


TFS150 - Dual Action Tamp

TFS150-Dual Action tamp is a Print & Apply solution especially designed for flexible and reliable Front and Side labelling - working from beside the conveyor. The Dual action tamp applies two separate labels with the same applicator and pad.

The TFS150 has the reliable, robust and easy to use design - as seen on all the Mectec family machines. It is proven to give you 24 hours reliable labelling for many years to come!

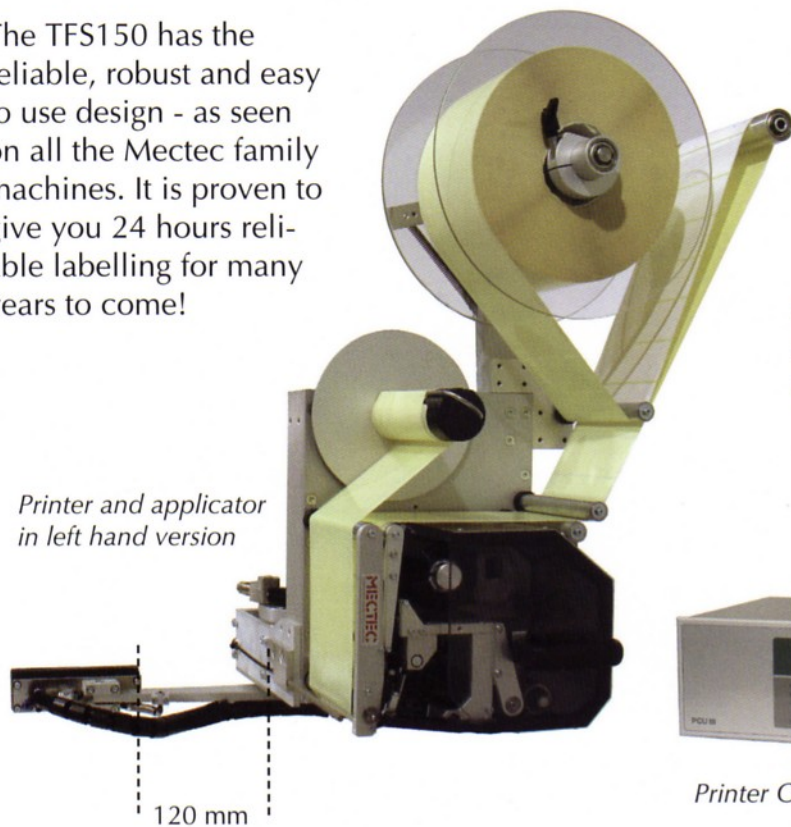

Handheld terminal TG300 (optional)

TECHNICAL DATA

Type of applicator:	Tamp/Tamp-Blow. The blow can be switched off
Tamp size:	150 x 45 mm
Print speed:	Up to 275 mm/sec
Resolution:	8 or 12 dots/mm 200/300 DPI
Interface:	2 x RS232, 1 x USB 2.0 (RS485 and Ethernet optional)
Overall dimensions:	455 x 540 x 630 mm (l x h x w) - P & A 406 x 265 x 128 mm (l x h x w) - PCU III
Controller functions:	On-Line and Stand Alone operation, 2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets and much more...!

FAST FACTS

Printer:	6" Thermal Transfer
Application:	Front and side labelling on moving object
Label size:	100 x 30 - 160 x 45 mm
Distance:	120 mm

Available in both right- and left hand version!

ACCESSORIES

- TG300 - Handheld terminal
- Warning Low Level Media
- Cabinets
- Label Check in the Applicator Pad
- Flashlight/Beacon
- Check scanner
- Fixed or adjustable stands

Industrial Labelling Systems Ltd.

Unit D4 Brookside Industrial Estate, Greengate, Middleton, Manchester. M24 1GS

Tel: 0161 655 4846 Fax: 0161 655 4849 Email: sales@ilsystems.co.uk

www.ilsystems.co.uk